

XD120



XD120

Vibratory Roller

XD120 dual-drive dual-vibration vibratory road roller features small amplitude, high frequency vibration, big exciting force as well as separate vibration. It is mainly applicable to compaction work on asphalt top layer of newly built pavement and thinner stable soil pavement, and road maintenance work. With compact structure, high flexibility, small blind area, high operating comfort, it is an ideal compaction equipment for municipal maintenance and highway custody.



XCMG ROAD MACHINERY BUSINESS UNIT

Performance and characteristics

- Its unique XCMG series 5 industrial design won the German Red Dot Award in 2020.
- Comfortable and safe control system
Bilateral access, bright color paint, ergonomics design principle;
Spacious operating platform provides enough space for operator's movement, operator's seat has three-level shock absorption;


Foldable CE ROPS provides safety protection under emergency;

Driving safety and reliability is guaranteed by three means of braking: neutral brake, secondary brake and parking brake. Waterproof instrument control panel, simple and intuitive. (f) All switch buttons are arranged for clear and intuitive operation.

Main dimensions

Unit: mm

Model	A	B	C	D	E	F	G	H	I	K
XD120	2610	1286	2575	275	1200	1773	43	1845	12	720

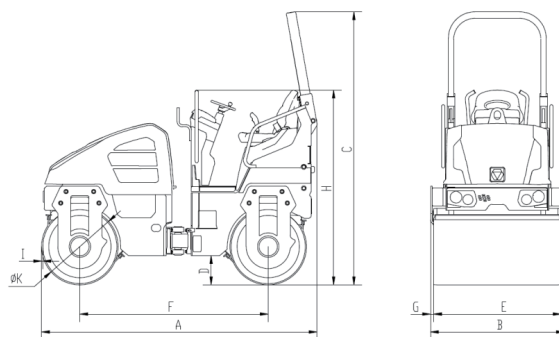

Main specifications

Item	Content	Unit	XD120
Weights Parameters	Operating weight	kg	2850
	Front axle weight	kg	1350
	Rear axle weight	kg	1500
	Static linear load	N/cm	110/122
Driving Parameters	Working speed	km/h	0~10
	Theoretical gradeability	%	30
	Minimum turning radius (inside/outside)	mm	2500/3700
	Minimum Ground Clearance	mm	275
	Wheelbase	mm	1773
	Oscillation angle	°	±8
	Brakdistance(smooth cement pavement)	m	<3.4
Compaction Parameters	Vibration frequency	Hz	63/67
	Nominal amplitude	mm	0.5
	Excitation force (high/low frequency)	kN	36/41
	Drum diameter	mm	720
	Drum width	mm	1200
Hydraulic System	Charge pressure, drive system	MPa	2.5
	Peak pressure, drive system	MPa	38
	Peak pressure, vibration system	MPa	25
	Peak pressure, steering system	MPa	16
Engine	Model		KUBOTA D1703
	Type		In-line 3-cylinder water-cooled
	Rated power	kW	25.6
	Rated speed	r/min	2600
Miscellaneous	Drive method		Hydrostatic closed-loop
	Vibration method		Hydrostatic open-loop
	Service brake		Hydraulic
	Parking brake		Mechanic/hydraulic
	Secondary brake		Mechanic/hydraulic
	Steering system		Articulated
	Steering control		Hydraulic